




## A.R.K7J DATA SHEET

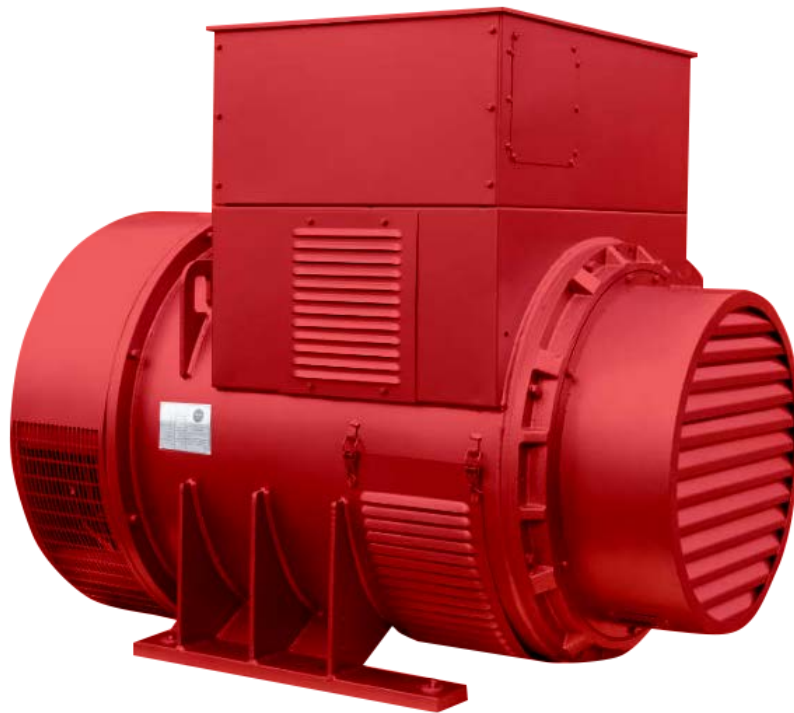

## SPECIFICATIONS & OPTIONS

### Standards

- A.R.K series alternator conforms to the major international standards and specifications, including:
  - IEC60034, GB755, BS5000, VDE0530, NEMA, MG1-22, C22.2-100, CSA, AS1359 standard, etc.
- A.R.K series alternator is certified by ISO9001 quality system.
- A.R.K series alternator can be used for the generator set of CE mark.
- Other standards and certification can be based on customer requirements.

### Electrical characteristics

- Insulation & Impregnating  
Class H insulation.  
All wound components are impregnated with material and processes designed specially to provide protection against harsh environments encountered in generator application. Resin based materials are selected and developed to provide the high build required for static windings and the high mechanical strength required for rotating components.
- 3-phase reconnectable with 12 ends brought out to the terminals.
- 2/3 pitch, can eliminate triple (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads.
- Telephone interference  
THF(as defined by IEC 60034-1) is less than 2%, TIF(as defined by NEMA MG1-32) is less than 50.
- Radio interference  
Brushless device and the high quality AVR ensure low levels of interference with radio transmissions. RFI suppression module may be installed if required.
- High efficiency and motor startup capability.

### Mechanical properties

- Steel structure.
  - Cast aluminum for front and rear cover.
  - Rigid assembly, effectively reduces the vibration during running.
  - All rotors are dynamically balanced to conform with BS6861.
  - Half key dynamic balance is applied in double bearing structure.
  - Non-maintenance sealed-for-life ball bearing.
  - 120% overspeed ability.
- Standard  
Protection grade
- A.R.K series alternator protection level is IP23.
  - Suitable for environment with 95% relative humidity.
  - optional
    - Inlet and filter, power reduced by 5%.
    - Inlet and outlet filter, power reduced by 10% (IP44)
    - Anti-condensation heater.
    - Stator winding, bearing overheating protection.
    - Outlet line design of outlet box.
    - Center height can be customized according to requirements.

### Excitation and voltage regulation system

| MODEL                     | 16 series | 18 series | 22 series | 27 series | 4 series | 5 series | 6 series | 7 series |
|---------------------------|-----------|-----------|-----------|-----------|----------|----------|----------|----------|
| AVR                       |           |           |           |           |          |          |          |          |
| SX460                     | Standard  | Standard  | Standard  | Standard  |          |          |          |          |
| AS440( parallel optional) | Optional  | Optional  | Optional  | Optional  |          |          |          |          |
| SX440( parallel optional) |           |           | Optional  | Optional  | Standard | Standard |          |          |
| MX341(with PMG)           |           |           | Optional  | Optional  | Optional | Optional |          |          |
| MX321(with PMG)           |           |           |           |           |          |          | Standard | Standard |

With the self-excited system, the main stator provides power via the automatic voltage regulator(AVR) to the exciter stator. The high efficiency AVR ensures the voltage maintaining at the rated level.

The exciter rotor output is fed to the main rotor through a three phase full wave bridge rectifier. The rectifier is protected by surge suppressor from voltage spikes of short circuit or phase mismatching.

### Application

Prime power, rental, telecom, mobile power station, lighting tower, railway, refrigeration and standby power.

### Quality assurance

A.R.K series alternators are manufactured using production procedures having a quality assurance level to ISO 9001.

Note: Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.

## A.R.K7J





### Parameters (WINDING 311)

|                         |                        |
|-------------------------|------------------------|
| CONTROL SYSTEM          | SELF EXCITED           |
| A.V.R.                  | MX341 WITH PMG         |
| VOLTAGE REGULATION      | ± 1.0 %                |
| SUSTAINED SHORT CIRCUIT | >300% OF RATED CURRENT |





|                                      |   |         |         |         |                                  |         |         |         |
|--------------------------------------|---|---------|---------|---------|----------------------------------|---------|---------|---------|
| INSULATION SYSTEM                    | H   |         |         |         |                                  |         |         |         |
| RATED POWER FACTOR                   | 0.8   |         |         |         |                                  |         |         |         |
| PROTECTION                           | IP23  |         |         |         |                                  |         |         |         |
| STATOR WINDING                       | DOUBLE LAYER  |         |         |         |                                  |         |         |         |
| ROTOR WINDING                        | WITH DAMPING CAGE   |         |         |         |                                  |         |         |         |
| WINDING LEADS                        | 6   |         |         |         |                                  |         |         |         |
| STATOR WDG. RESISTANCE               | 0.00082 Ohms PER PHASE AT 22°C SERIES STAR CONNECTED                                |         |         |         |                                  |         |         |         |
| ROTOR WDG. RESISTANCE                | 1.87 Ohms at 22°C   |         |         |         |                                  |         |         |         |
| R.F.I. SUPPRESSION                   | BS EN 61000-6-2 & BS EN 61000-6-4,VDE 0875G, VDE 0875N. refer to factory for others |         |         |         |                                  |         |         |         |
| WAVEFORM DISTORTION                  | NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%                           |         |         |         |                                  |         |         |         |
| MAXIMUM OVERSPEED                    | 2250 Rev/Min  |         |         |         |                                  |         |         |         |
| BEARING DRIVE END                    | BALL. 6232 (ISO)  |         |         |         |                                  |         |         |         |
| BEARING NON-DRIVE END                | BALL. 6319 (ISO)  |         |         |         |                                  |         |         |         |
|                                      | 1 BEARING   |         |         |         | 2 BEARING                        |         |         |         |
| WEIGHT COMP. GENERATOR               | 4010 kg   |         |         |         | 4100 kg                          |         |         |         |
| WEIGHT WOUND STATOR                  | 2100 kg   |         |         |         | 2100 kg                          |         |         |         |
| WEIGHT WOUND ROTOR                   | 1679 kg   |         |         |         | 1635 kg                          |         |         |         |
| WR <sup>2</sup> INERTIA              | 52.8436 kgm <sup>2</sup>  |         |         |         | 51.9266 kgm <sup>2</sup>         |         |         |         |
| SHIPPING WEIGHTS in a crate          | 4085 kg   |         |         |         | 4168 kg                          |         |         |         |
| PACKING CRATE SIZE                   | 216 x 105 x 154 (cm)  |         |         |         | 216 x 105 x 154 (cm)             |         |         |         |
|                                      | 50HZ  |         |         |         | 60HZ                             |         |         |         |
| TELEPHONE INTERFERENCE               | THF<2%  |         |         |         | TIF<50                           |         |         |         |
| COOLING AIR                          | 2.75 m <sup>3</sup> /sec 5827 cfm   |         |         |         | 3.5 m <sup>3</sup> /sec 7417 cfm |         |         |         |
| VOLTAGE SERIES STAR                  | 380/220   | 400/231 | 415/240 | 440/254 | 416/240                          | 440/254 | 460/266 | 480/277 |
| VOLTAGE PARALLEL STAR                | 190/110   | 200/115 | 208/120 | 220/127 | 208/120                          | 220/127 | 230/133 | 240/138 |
| VOLTAGE SERIES DELTA                 | 220/110   | 230/115 | 240/120 | 254/127 | 240/120                          | 254/127 | 266/133 | 277/138 |
| kVA BASE RATING FOR REACTANCE VALUES | 2080  | 2150    | 2150    | 1955    | 2275                             | 2406    | 2515    | 2625    |
| Xd DIR. AXIS SYNCHRONOUS             | 3.60  | 3.36    | 3.12    | 2.53    | 3.95                             | 3.73    | 3.57    | 3.42    |
| X'd DIR. AXIS TRANSIENT              | 0.20  | 0.19    | 0.18    | 0.14    | 0.22                             | 0.21    | 0.20    | 0.19    |
| X''d DIR. AXIS SUBTRANSIENT          | 0.14  | 0.13    | 0.12    | 0.10    | 0.16                             | 0.15    | 0.15    | 0.14    |
| Xq QUAD. AXIS REACTANCE              | 2.33  | 2.17    | 2.02    | 1.63    | 2.55                             | 2.41    | 2.31    | 2.21    |
| X''q QUAD. AXIS SUBTRANSIENT         | 0.26  | 0.24    | 0.22    | 0.18    | 0.28                             | 0.26    | 0.25    | 0.24    |
| X L LEAKAGE REACTANCE                | 0.08  | 0.07    | 0.07    | 0.05    | 0.09                             | 0.09    | 0.08    | 0.08    |
| X 2 NEGATIVE SEQUENCE                | 0.21  | 0.20    | 0.19    | 0.15    | 0.23                             | 0.22    | 0.21    | 0.20    |
| X 0 ZERO SEQUENCE                    | 0.03  | 0.03    | 0.03    | 0.02    | 0.05                             | 0.04    | 0.04    | 0.04    |
| REACTANCES ARE SATURATED             | VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED                                 |         |         |         |                                  |         |         |         |
| T'd TRANSIENT TIME CONST.            | 0.18s   |         |         |         |                                  |         |         |         |
| T''d SUB-TRANSTIME CONST.            | 0.014s  |         |         |         |                                  |         |         |         |
| T'do O.C. FIELD TIME CONST.          | 3.4s  |         |         |         |                                  |         |         |         |
| Ta ARMATURE TIME CONST.              | 0.063s  |         |         |         |                                  |         |         |         |
| SHORT CIRCUIT RATIO                  | 1/Xd  |         |         |         |                                  |         |         |         |

|                                   |          |          |          |          |          |
|-----------------------------------|----------|----------|----------|----------|----------|
| EXTATION SYSTEM                   | SX460    | SX440    | AS440    | MX341    | MX321    |
| VOLTAGE REGULATION RATE           | ±1.5%    | ±1.0%    | ±1.0%    | ±1.0%    | ±0.5%    |
| LOW SPEED VOLTAGE DROP PROTECTION | Standard | Standard | Standard | Standard | Standard |
| SHORT-CIRCUITED ELECTRIC ABILITY  |          |          |          | 300%:10S | 300%:10S |
| PARALLEL OPERATION                |          | Optional | Optional | Optional | Optional |



**A.R.K7J**  
**Three Phase Efficiency Curves (WINDING 311) 50HZ**

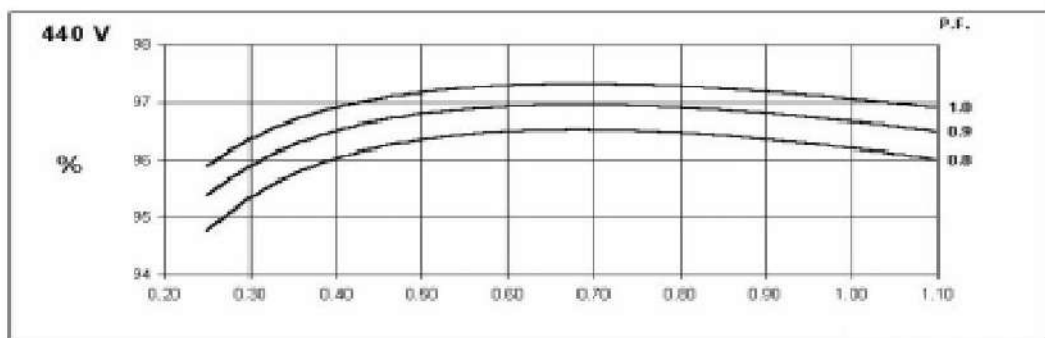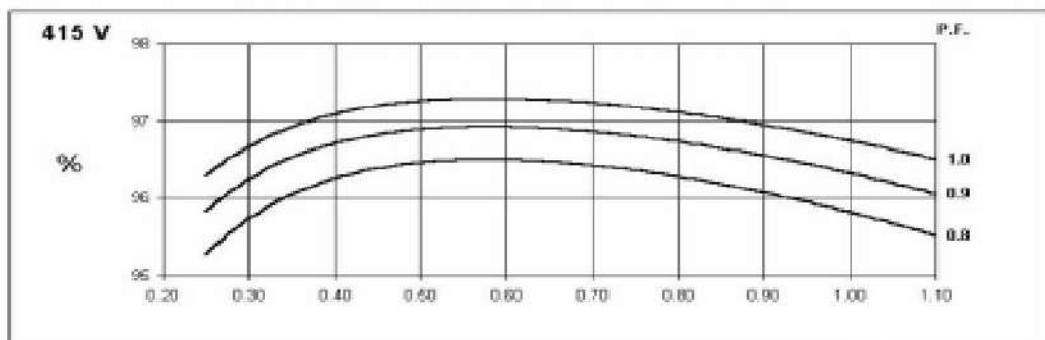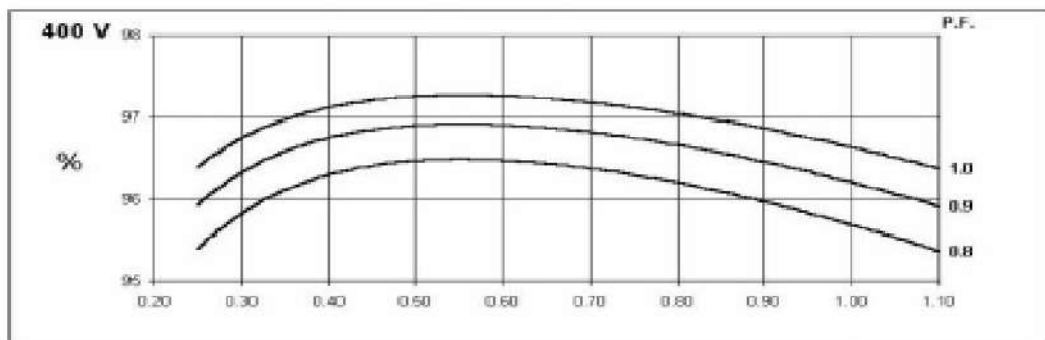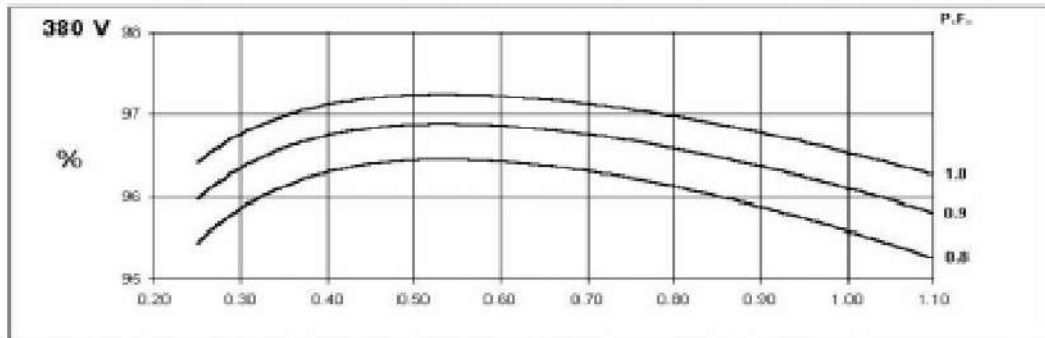

A.R.K7J  
Three Phase Efficiency Curves (WINDING 311) 60HZ

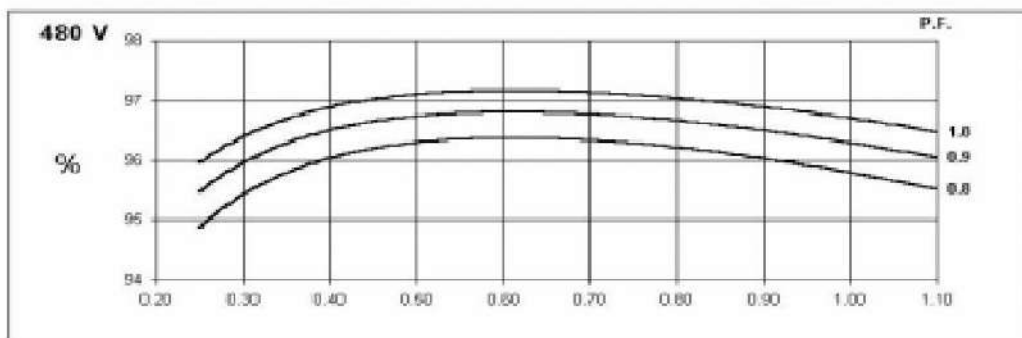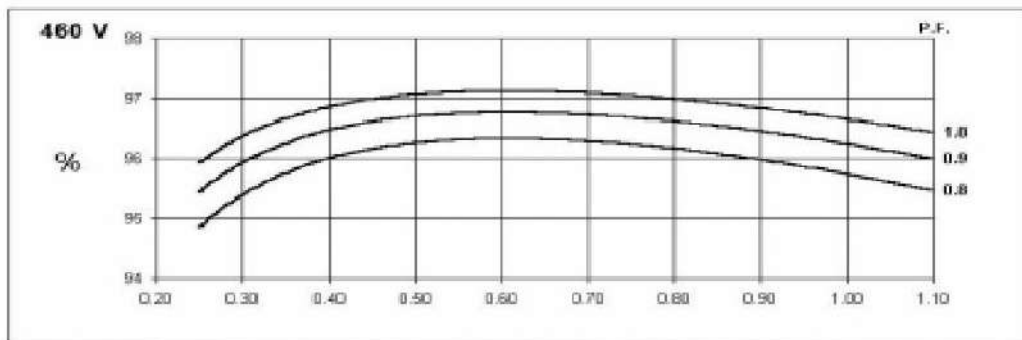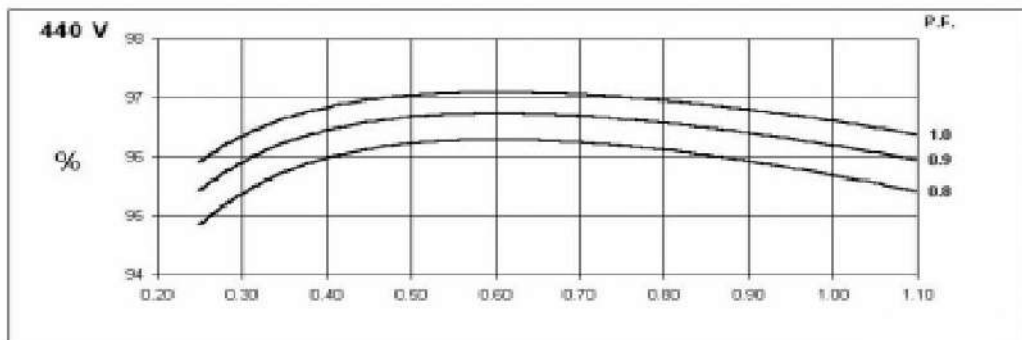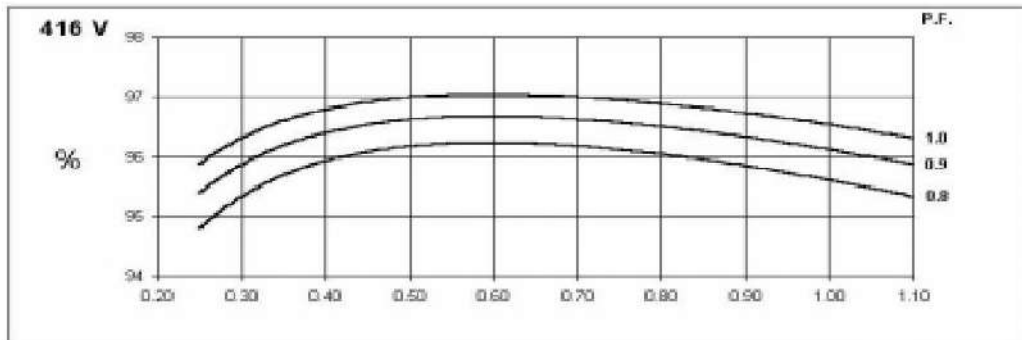


A.R.K7J  
Locked Rotor Motor Starting Curve (Winding 311)

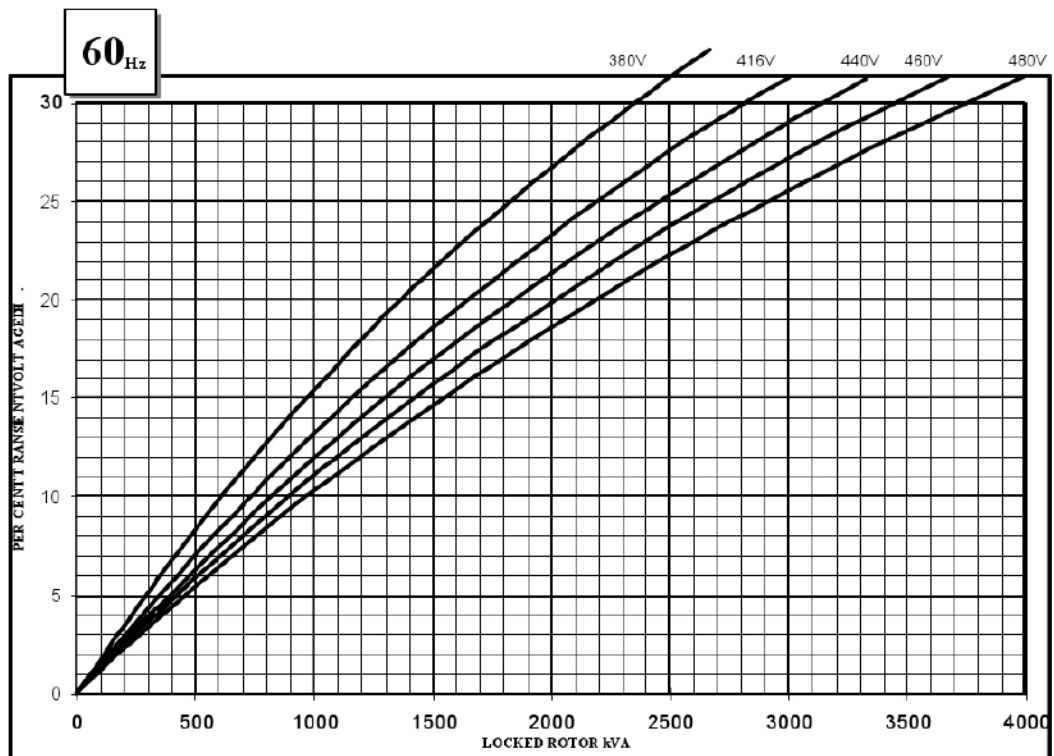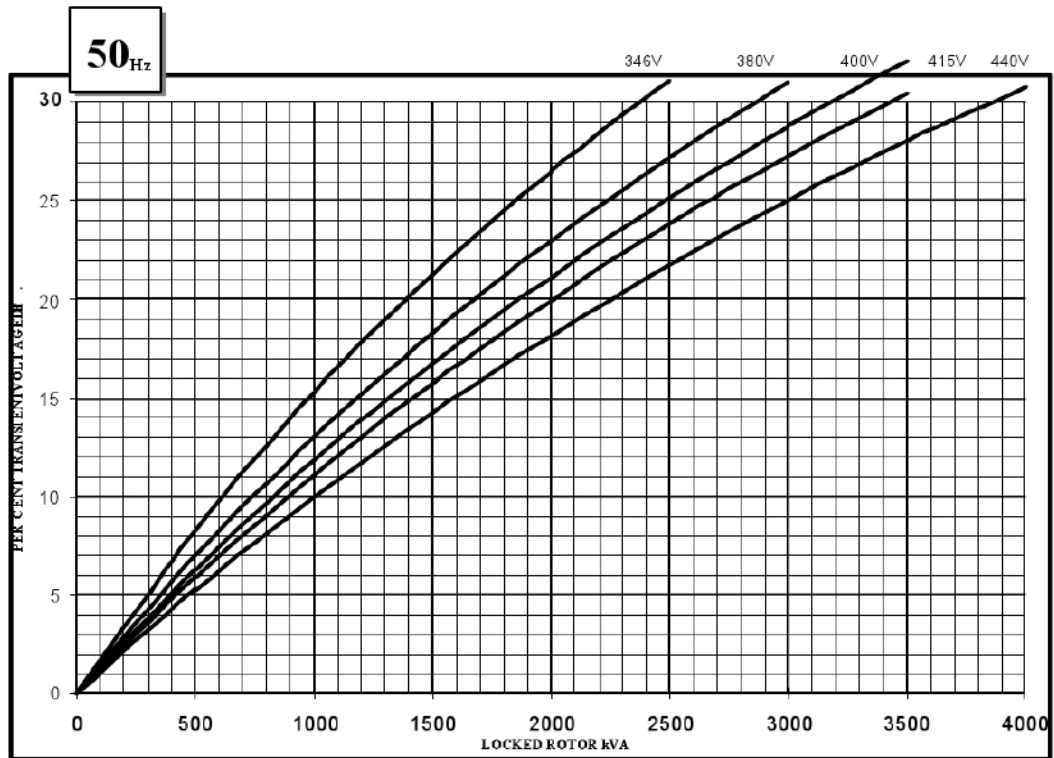

A.R.K7J


**Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed  
Based on star (wye) connection.**

**50  
Hz**

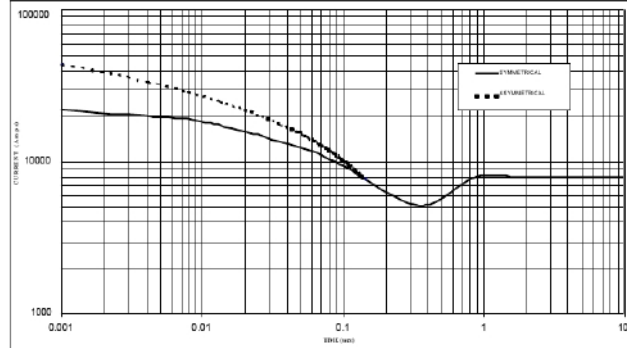

Sustained Short Circuit = 7,900 Amps

**60  
Hz**

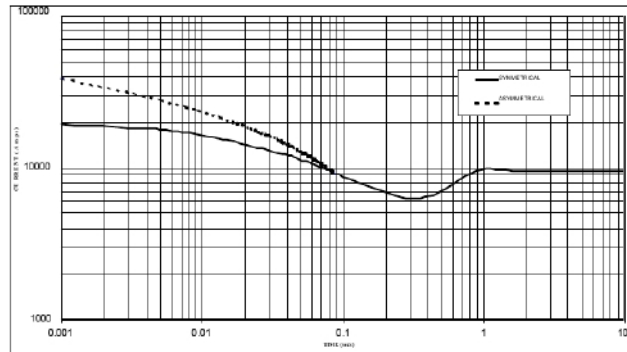

Sustained Short Circuit = 9,471 Amps

**1.The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage**

| 50HZ    |        | 60HZ    |        |
|---------|--------|---------|--------|
| Voltage | Factor | Voltage | Factor |
| 380V    | X 1.00 | 416V    | X 1.00 |
| 400V    | X 1.06 | 440V    | X 1.06 |
| 415V    | X 1.10 | 460V    | X 1.10 |
| 440V    | X 1.15 | 480V    | X 1.15 |

The sustained current value is constant irrespective of voltage level

**2.The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :**

|                         | 3-phase | 2-phase L-L | 1-phase L-N |
|-------------------------|---------|-------------|-------------|
| Instantaneous           | x 1.00  | x 0.87      | x 1.30      |
| Minimum                 | x 1.00  | x 1.80      | x 3.20      |
| Sustained               | x 1.00  | x 1.50      | x 2.50      |
| Max. sustained duration | 10 sec. | 5 sec.      | 2 sec.      |

All other times are unchanged

**3.Curves are drawn for Star (Wye) connected machines.**

**For other connection the following multipliers should be applied to current values as shown :**

Parallel Star = Curve current value X 2

Series Delta = Curve current value X 1.732


**A.R.K7J**  
**Winding 311 / 0.8 Power Factor**  
**RATINGS**

| Class - Temp Rise |                    | Cont. F - 105/40°C |      |      |      | Cont. H - 125/40°C |      |      |      | Standby - 150/40°C |      |      |      | Standby - 163/27°C |      |      |      |
|-------------------|--------------------|--------------------|------|------|------|--------------------|------|------|------|--------------------|------|------|------|--------------------|------|------|------|
| 50HZ              | Series Star (V)    | 380                | 400  | 415  | 440  | 380                | 400  | 415  | 440  | 380                | 400  | 415  | 440  | 380                | 400  | 415  | 440  |
|                   | Parallel S tar (V) | 190                | 200  | 208  | 220  | 190                | 200  | 208  | 220  | 190                | 200  | 208  | 220  | 190                | 200  | 208  | 220  |
|                   |                    | 220                | 230  | 240  | 254  | 220                | 230  | 240  | 254  | 220                | 230  | 240  | 254  | 220                | 230  | 240  | 254  |
|                   | kVA                | 1906               | 1971 | 1971 | 1792 | 2080               | 2150 | 2150 | 1955 | 2180               | 2280 | 2280 | 2072 | 2280               | 2350 | 2350 | 2251 |
|                   | kW                 | 1525               | 1577 | 1577 | 1434 | 1664               | 1720 | 1720 | 1564 | 1744               | 1824 | 1824 | 1658 | 1824               | 1880 | 1880 | 1772 |
| Efficiency (%)    |                    | 95.8               | 95.9 | 96   | 96.3 | 95.6               | 95.7 | 95.8 | 96.2 | 95.4               | 95.5 | 95.6 | 96.1 | 95.3               | 95.4 | 95.5 | 95.9 |

| Class - Temp Rise |                    | Cont. F - 105/40°C |      |      |      | Cont. H - 125/40°C |      |      |      | Standby - 150/40°C |      |      |      | Standby - 163/27°C |      |      |      |
|-------------------|--------------------|--------------------|------|------|------|--------------------|------|------|------|--------------------|------|------|------|--------------------|------|------|------|
| 60HZ              | Series Star (V)    | 416                | 440  | 460  | 480  | 416                | 440  | 460  | 480  | 416                | 440  | 460  | 480  | 416                | 440  | 460  | 480  |
|                   | Parallel S tar (V) | 208                | 220  | 230  | 240  | 208                | 220  | 230  | 240  | 208                | 220  | 230  | 240  | 208                | 220  | 230  | 240  |
|                   |                    | 240                | 254  | 266  | 277  | 240                | 254  | 266  | 277  | 240                | 254  | 266  | 277  | 240                | 254  | 266  | 277  |
|                   | kVA                | 2085               | 2206 | 2305 | 2406 | 2275               | 2406 | 2515 | 2625 | 2410               | 2549 | 2665 | 2781 | 2486               | 2630 | 2749 | 2869 |
|                   | kW                 | 1668               | 1765 | 1844 | 1925 | 1820               | 1925 | 2012 | 2100 | 1928               | 2039 | 2132 | 2225 | 1989               | 2104 | 2199 | 2295 |
| Efficiency (%)    |                    | 95.8               | 95.9 | 95.9 | 96   | 95.6               | 95.7 | 95.7 | 95.8 | 95.4               | 95.5 | 95.6 | 95.6 | 95.3               | 95.4 | 95.5 | 95.5 |

**DIMENSIONS**

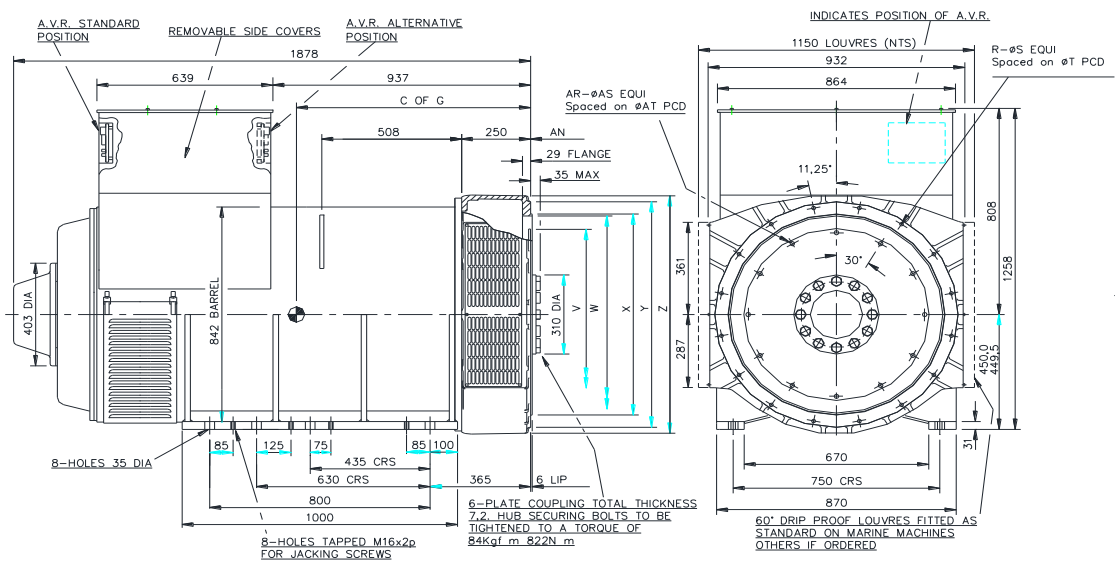

| MODEL | A    | B    | C   | C OF G |
|-------|------|------|-----|--------|
| 7G    | 1878 | 929  | 485 | 850    |
| 7H    |      |      |     | 850    |
| 7J    | 1940 | 1013 | 593 | 915    |
| 7K    |      |      |     |        |

UNIT: (mm)

| ADAPTOR | X     | Y   | Z   | N  | R  | S  | T     |
|---------|-------|-----|-----|----|----|----|-------|
| SAE00   | 787.4 | 882 | 944 | 16 | 12 | 14 | 851   |
| SAE0    | 647.7 | 711 | 944 | 16 | 16 | 14 | 679.5 |

| COUPLING DISC | W      | AN    | AR | AS   | AT    |
|---------------|--------|-------|----|------|-------|
| SAE24         | 733.3  | 0     | 12 | 20.7 | 692   |
| SAE21         | 673.02 | 0     | 12 | 16.7 | 641.3 |
| SAE18         | 571.42 | 15.87 | 6  | 16.7 | 543.0 |